

PRODUCT DATA SHEET


HOLMATRO CCU10 MINI CUTTER

Specifications

Article number	151.001.500	
Model	CCU10	
Short description	Mini Cutter	
Max. working pressure	bar/Mpa	720 / 72
Battery included	Yes	
Max. cutting opening	mm	59
Theoretical cutting force	kN/t	220 / 22.4
Protection rate	IP54	
Sound emission @ 1m/3.25ft	dB(A)	74
Sound emission @ 4m/13ft	dB(A)	65
Hydraulic oil type	ISO-L HV VG 36	
Cutter jaw	Inclined	
Weight, ready for use (incl. battery)	kg	4.9
Weight (excl. battery)	kg	4.5
Temperature range	°C	-20 +55
Dimensions	mm	554 x 154 x 92
EN 13204 compliant	Yes	
EN 13204 classification	AC59B-4.9	
EN 13204, cutting capacity	1D 2D 3C	
NFPA 1960 compliant	Yes	
NFPA 1960, cutting capacity	A4 B3 C2 D4 E4	
Round bar (S235 acc. to EN 13204)	mm	22

Standard Supplied With

- i-Bolt Technology
- Integrated LED lighting
- Two 18V 2Ah batteries CBPA182

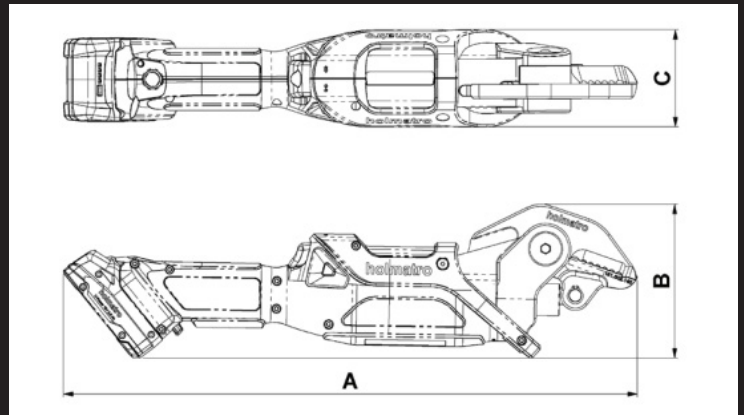

Safety Factors / Tests

Hydraulic safety factor	2:1
Endurance test tool	1000 cycles of biting in material that cannot be cut
Endurance test dead man's button	6000 cycles

Required Accessories

Battery charger CBCH1 (AC-EU)	151.002.112
Battery charger CBCH5 (AC-UK)	151.002.113
Battery charger CBCH7 (AC-AU/NZ)	151.002.114
Battery charger CBCH2 (AC-US)	159.000.212

